



确 认 书

Specifications for Approval

客户 Customer : _____

LCM/LCD 型号 No.: KD19264B-3-FSTN-Gray

工艺部批准PROCESS DEPT.	质控部批准 QC DEPT.	设计部批准 DESIGN DEPT.

客户意见 Comments	客户确认签字盖章 Customer Approval with Signature and chop	柯达科公司签字盖章 Startek Approval with Signature and chop
	确认日期 : Date :	交样日期 : Date :



Specification

For

LCD Module

KD19264B-3-FSTN-Gray

PRODUCT SPECIFICATIONS

PHYSICAL DATA

EXTERNAL DIMENSIONS

BLOCK DIAGRAM

ABSOLUTE MAXIMUM RATINGS

ELECTRICAL CHARACTERISTICS

OPERATING PRINCIPLES & METHODS

ELECTRO-OPTICAL CHARACTERISTICS

INTERFACE PIN CONNECTIONS

PART LIST

PELIABILITY

QUALITY GUARANTEE

INSPECTION CRITERIA

PRECAUTIONS FOR USING LCD MODULES

USING LCD MODULES


BACKLIGHT EXPLAIN



PHYSICAL DATA

I ten	Contents	Uni t
LCD type	STN	---
LCD duty	1/64	---
LCD bias	1/9	---
Viewing direction	6	0'clock
Module size(W x H x T)	120.0 X 62.0 X13.5 MAX	mm
Viewing area(W x H)	100.0 X 37.0	mm
Number of dots	192 X64	dots
Dots size(W x H)	0.46 X 0.46	mm
Dots pitch(W x H)	0.50 X 0.50	mm

EXTERNAL DIMENSIONS

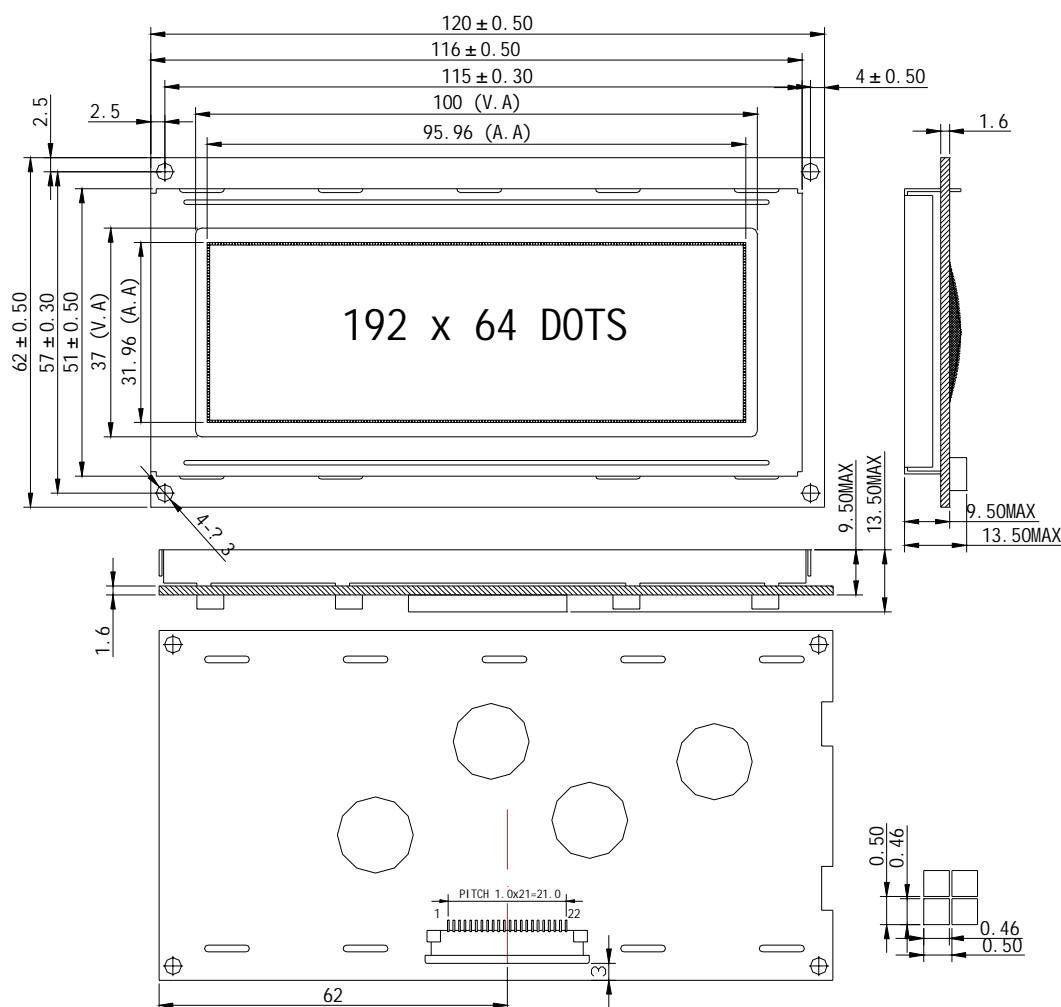


DISPLAY TYPE: FSTN/POSITIVE Gray
DISPLAY MODE: TRANSFLECTIVE
VIEWING DIRECTION: 6:00
DRIVING METHOD: 1/64 DUTY 1/9 BIAS
OPERATING VOLTAGE: 13.0V
OPERATING TEMPERATURE: -20 ° ~70 ° C
STORAGE TEMPERATURE: -30 ° ~80 ° C
CONNECTOR: ZEBRA

1	2	3	4	5	6	7	8	9	10	11
VSS	VDD	VO	VEE	RS	R/W	E	DB0	DB1	DB2	DB3
12	13	14	15	16	17	18	19	20	21	22
DB4	DB5	DB6	DB7	CS1	CS2	CS3	RES	BLA	BLK	FG



BLOCK DIAGRAM

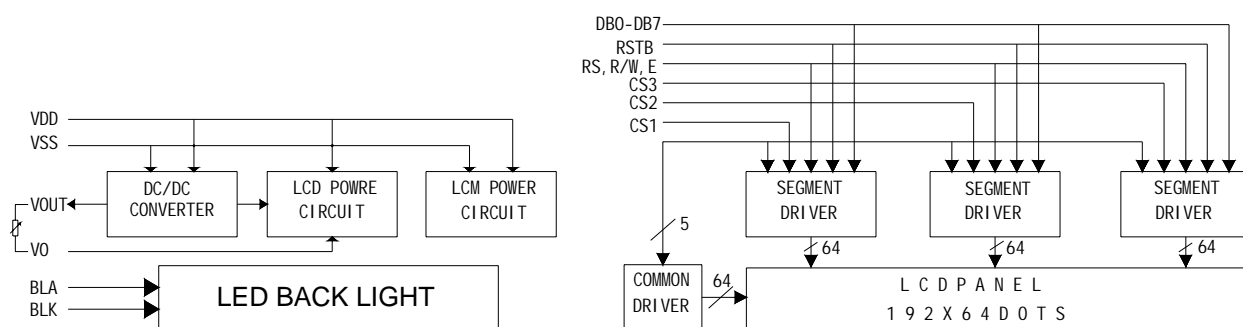

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

Parameter	Symbol	Min	Max	Unit
Supply voltage for logic	VDD	-0.3	7.0	V
Supply voltage for LCD	VDD-V0	-0.3	VDD+0.3	V
Input voltage	VI	-0.3	VDD+0.3	V
Operating temperature	TOP	-20	70	
Storage temperature	TST	-30	80	

ELECTRICAL CHARACTERISTICS($V_{DD}=+5.0V\pm5\%$, $V_{SS}=0V$, $T_a=25^\circ\text{C}$)

u DC Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Supply voltage for logic	VDD	---	4.5	5.0	5.5	V
Supply current for logic	IDD	---	---	5.1	10	mA
Operating voltage for LCD	VDD-V0	0	13.3	14.0	14.7	V
		25	12.8	13.5	14.2	V
		50	12.2	12.9	13.6	V
Input voltage 'H' level	VIH	---	0.7VDD	---	VDD	V
Input voltage 'L' level	VIL	---	0	---	0.3VDD	V

u AC Characteristics


MPU Interface

Characteristic	Symbol	Min	Typ	Max	Unit
E cycle	t _{cyE}	1000	---	---	ns
E high level width	t _{whE}	450	---	---	ns
E low level width	t _{wlE}	450	---	---	ns
E rise time	T _r	---	---	25	ns
E fall time	T _f	---	---	25	ns
Address set-up time	T _{as}	140	---	---	ns




Address hold time	Tah	10	---	---	ns
Data set-up time	Tdsw	200	---	---	ns
Data delay time	Tddr	---	---	320	ns
Data hold time (write)	Tdhw	10	---	---	ns
Date hold time (read)	Tdhr	20	---	---	ns

MPU Writing timing

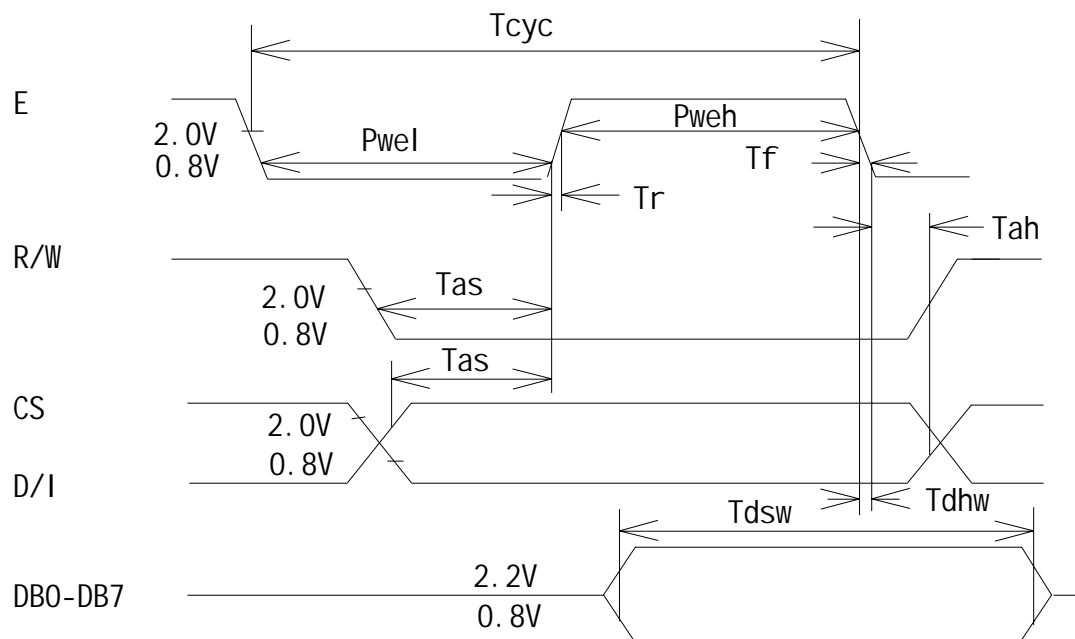

MPU Reading Timing

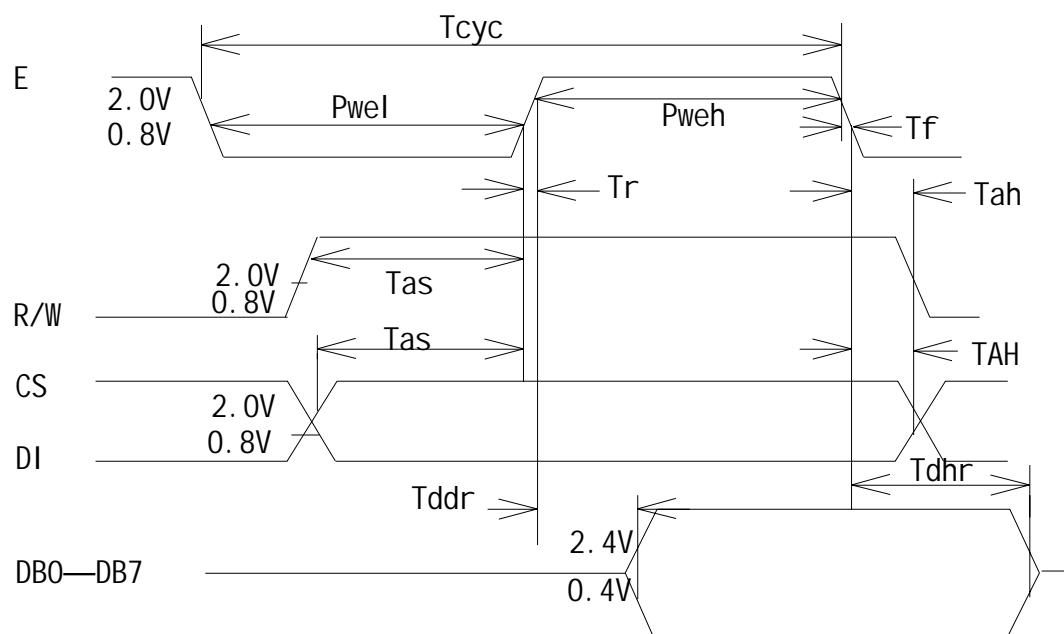



OPERATING PRINCIPLES & METHODS

u I/O Buffer

Input buffer controls the status between the enable and disable of chip. Unless the CS1, CS2 or CS3 is in active mode, input or output of data and instruction do not execute. Therefore internal state is not changed. But RSTB can operate regardless of CS1, CS2 and CS3.

u Input Register

Input register is provided to interface with MPU which is different operating frequency. Input register stores the data temporarily before writing it into display data RAM.

When CS1, CS2 or CS3 is in the active mode, R/W and RS select the input register. The data from MPU is written into input register and then write it into display data RAM. Data is latched when falling of the E signal and written automatically into the display data RAM by internal operation.

u Output Register

Output register stores the data temporarily from display data RAM when CS1, CS2 or CS3 is in active mode and R/W and RS=H. Stored data in display data RAM is latched in output register. When CS1, CS2 or CS3 is in active mode and R/W=H, RS=L, status data (busy check) can be read out.

To read the contents of display data RAM, twice access of read instruction is needed. In first access, data in display data RAM is latched into output register. In second access, MPU can read data which is latched. That is, to read the data in display data RAM, it needs dummy read. But status read does not need dummy read.

RS	R/W	Function
0	0	Instruction
	1	Status read (busy check)
1	0	Data write (from input register to display data RAM)
	1	Data read (from display data RAM to output register)

u Reset

System reset can be initialized by setting RSTB terminal at low level when turning power on, receiving instruction from MPU. When RSTB becomes low, following procedure is occurred.

-Display off


-Display start line register become set by 0. (Z-address 0)

While RSTB is low level, no instruction except status read can be accepted. Reset status appears at DB4. After DB4 is low, any instruction can be accepted.

The Conditions of power supply at initial power up are shown in table 1.

Table1. Power Supply Initial Conditions


Item	Symbol	Min	Typ	Max	Unit
Reset time	T _{RST}	1.0	---	---	us
Rise time	Tr	---	---	200	ns

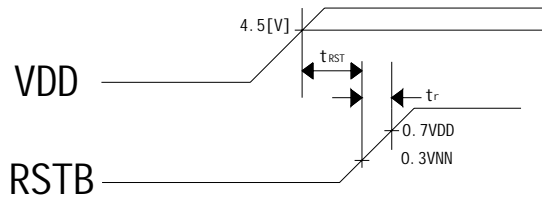

u Busy Flag

Busy flag indicates that NT7108 is operating or not operating. When busy flag is high, NT7108 is in internal operating. When busy flag is low, NT7108 can accept the data or instruction.

DB7 indicates busy flag of the NT7108.

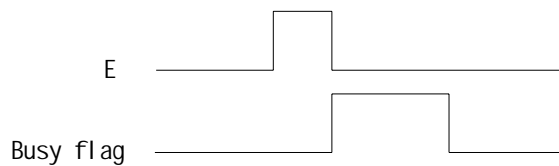

u Display ON/OFF Flip-Flop

The display on/off flip-flop makes on/off of the liquid crystal display. When flip-flop is reset (logical low), selective voltage or non selective voltage appears on segment output terminals. When flip-flop is set (logical high), non selective voltage appears on segment output terminals regardless of display RAM data.

The display on/off flip-flop can change status by instruction. The display data at all segment disappear while RSTB is low. The status of the flip-flop is output to DB5 by read instruction.

u X page Register

X page register designates page of the internal display data RAM. It has no count function. An address is set by instruction.

u Y Address Counter

Y address counter designates address of the internal display data RAM. An address is set by instruction and is increased by 1 automatically by read or write operations of display data.

u Display Data RAM

Display data RAM stores a display data for liquid crystal display. To express on state of dot matrix of liquid crystal display, write data 1. The other way, off state writes 0.

u Display Start Line Register

The display start line register indicates address of display data RAM to display top line of liquid crystal display. Bit data (DB<0:5>) of the display start line set instruction is latched in display start line register. It is used for scrolling of the liquid crystal display screen.

u Display Control Instruction

The display control instructions control the internal state of the NT7108. Instruction is received from MPU to NT7108 for the display control. The following table shows various



instructions.


Instruction	R/W	D/I	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Function
Display on/off	L	L	L	L	H	H	H	H	H	L/H	Controls the display on or off. Internal status and display RAM data is not affected. L:OFF, H:ON
Set Address	L	L	L	H	Y address (0~63)						Sets the Y address in the Y address counter.
Set Page (X Address)	L	L	H	L	H	H	H	page (0~7)			Sets the X address at the X address register.
Display Start Line	L	L	H	H	Display start line (0~63)						Indicates the display data RAM display at the top of the screen
Status read	H	L	B U S Y	L	O N / O F F	R E S E T	L	L	L	L	Read the status : busy 1:working,0:ready ADC 1:clockwise output 0:counterclockwise ON/OFF 1:disp off 0:disp on RESET 1:reset 0:normal
Write Display Data	L	H	Write Data								Write data (DB0:7) into display data RAM. After writing instruction, Y address is increased by 1 automatically.
Read Display Data	H	H	Read Data								Read data (DB0:7) from display data RAM to the data bus

ELECTRO-OPTICAL CHARACTERISTICS(V_{OP}=13.5V,T_a=25℃)

Item	Symbol	Condition	Min	Typ	MAX	Unit	Remarks	Note
Response time	Tr	---	---	202	---	ms	---	1
	Tf	---	---	105	---	ms	---	1
Contrast ratio	Cr	---	---	22.4	---	---	---	2
Viewing angle range		Cr 2	37	---	---	deg	=90°	3
			34	---	---	deg	=270°	3
			45	---	---	deg	=0°	3
			75	---	---	deg	=180°	3




Note1: Definition of response time

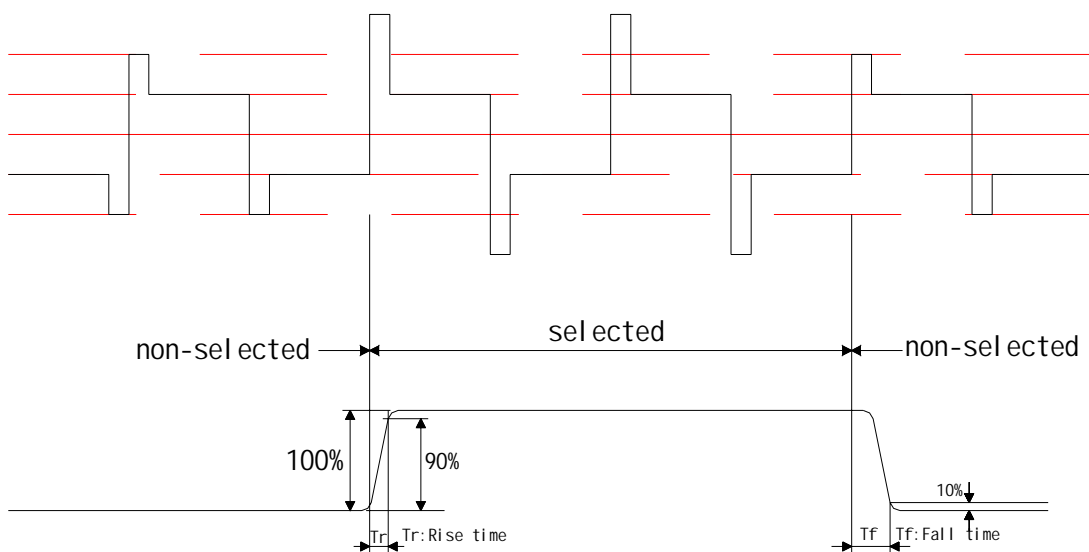


Note2: Definition of contrast ratio 'Cr'

$$Cr = \frac{\text{Brightness of non-selected segment}(B2)}{\text{Brightness of selected segment}(B1)}$$

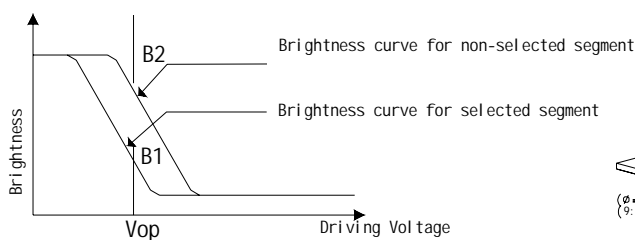

Note1: Definition of viewing angle range

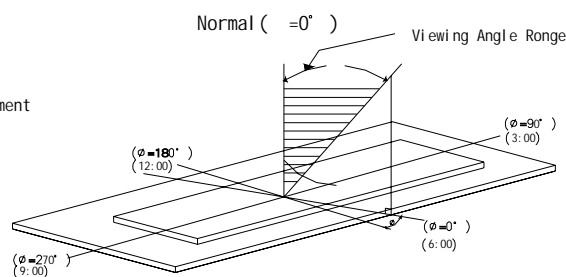

INTERFACE PIN CONNECTIONS

Pin NO.	Symbol	Level	Function
1	VSS	0V	Power Ground
2	VDD	+5V	Power supply
3	V0	--	For LCD drive voltage (variable)
4	VEE	--	Negative voltage(-15V)to LCD
5	RS	H/L	H: Display Data, L: Display Instruction
6	R/W	H/L	H: Read Signal, L: Write Signal
7	E	H/L	Enable Signal
8-15	DB0-DB7	--	Data bus
16	/CS1	H/L	L: Select chip , Active Low
17	/CS2	H/L	L: Select chip , Active Low
18	/CS3	H/L	L: Select chip , Active Low
19	/RES	H/L	Reset Signal
20	BLA	+5V	Power for LED Backlight
21	BLK	0V	Power for LED Backlight
22	FG	0V	Connect to frame



RELIABILITY

u Content of Reliability Test

Environmental Test				
No.	Test Item	Content of Test	Test Condition	Applicable Standard
1	High temperature storage	Endurance test applying the high storage temperature for a long time	60 200hrs	---
2	Low temperature storage	Endurance test applying the low storage temperature for a long time	-10 200hrs	---
3	High temperature operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time	50 200hrs	---*
4	Low temperature operation	Endurance test applying the electric stress under low temperature for a long time	0 200hrs	---
5	High temperature/ Humidity storage	Endurance test applying the high temperature and high humidity storage for a long time	60 ,90%RH 96hrs	MIL-202E-103B JIS-C5023
6	High temperature/ Humidity operation	Endurance test applying the electric stress (Voltage & Current) and temperature/humidity stress to the element for a long time	40 ,90%rh 96hrs	MIL-202E-103B JIS-C5023
7	Temperature cycle	Endurance test applying the low and high temperature cycle <div style="text-align: center;"> $\begin{array}{c} -10 \quad \xrightarrow{25} \quad 60 \\ 30\text{min} \quad \xleftarrow{5\text{min}} \quad 30\text{min} \\ \xleftarrow{\hspace{1.5cm}} \hspace{1.5cm} \xrightarrow{\hspace{1.5cm}} \\ \text{1 cycle} \end{array}$ </div>	-10 /60 10cycles	---
Mechanical Test				
8	Vibration test	Endurance test applying the vibration during transportation and using	10 ~ 22Hz-1.5mmp-p22 ~ 500Hz-1.5G Total0.5hrs	MIL-202E-201A JIS-C5025 JIS-C7022-A-10
9	Shock test	Constructional and mechanical endurance test applying the shock during transportation	50G half sign wave 11mseds 3times of each direction	MIL-202E-213B
10	Atmospheric pressure test	Endurance test applying the atmospheric pressure during transportation by air	115 mbar 40hrs	NIL202E-105C
Others				
11	Static electricity test	Endurance test applying the electric stress to the terminal	VS=800V, RS=1.5k CS=100pf 1time	MIL-883B-3015.1

* * * Supply voltage for logic system=5V. Supply voltage for LCD system = Operating voltage at 25

u Failure Judgement Criterion

Criterion Item	Test Item NO.											Failure Judgment Criterion
	1	2	3	4	5	6	7	8	9	10	11	
Basic specification												Out of the Basic Specification
Electrical characteristic												Out of the DC and AC Characteristic
Mechanical characteristic												Out of the Mechanical Specification Color change :out of Limit Apperance Specification
Optical characteristic												Out of the Apperance Standard



QUALITY GUARANTEE

u Acceptable Quality Level

Each lot should satisfy the quality level defined as follows.

-Inspection method:MIL-STD-105E LEVEL Normal one time sampling

-AQL

Partition	AQL	Definition
A:Major	0.4%	Functional defective as product
B:Minor	1.5%	Satisfy all functions as product but not satisfy cosmetic standard

u Definition of 'LOT'

One lot means the delivery quantity to customer at one time.

u Conditions of Cosmetic Inspection

Environmental condition

The inspection should be performed at the 1m of height from the LCD module under 2 pieces of 40W white fluorescent lamps (Normal temperature 20~50 and normal humidity 60±15%RH)

Inspection method




The visual check should be performed vertically at more than 30cm distance from the LCD panel.

Driving voltage

The V0 value which the most optimal contrast can be obtained near the specified V0 in the specification.
(Within ±0.5V of the typical value at 25).

INSPECTION CRITERIA

u Module Cosmetic Criteria

No.	Item	Judgement Criterion	Partition
1	Difference in Spec.	None allowed	Major
2	Pattern peeling	No substrate pattern peeling and floating	Major
3	Soldering defects	No soldering missing No soldering bridge No cold soldering	Major Major Minor
4	Resist flaw on substrate	Invisible copper foil(0.5mm or more)on substrate pattern	Minor
5	Accretion of metallic Foreign matter	No soldering dust No accretion of metallic foreign matters(Not exceed 0.2mm)	Minor
6	Stain	No stain to spoil cosmetic badly	Minor
7	Plate discoloring	No plate fading, rusting and discoloring	Minor
8	Solder amount 1. Lead parts	a. Soldering side of PCB Solder to form a 'Filet' all around the lead. Solder should not hide the lead form perfectly. (too much)  b. Components side (In case of 'Through Hole PCB') Solder to each the Components side of PCB.	Minor
	2. Flat packages	Either 'Toe'(A) or 'Seal'(B) of The lead to be covered by 'Filet'. Lead form to be assume over solder. 	Minor
	3. Chlips	(3/2)H h (1/2)H 	Minor



u Screen Cosmetic Criteria (Non-Operating)

No.	Defect	Judgement Criterion		Partition
1	Sports	In accordance with Screen Cosmetic Criteria (Operating) NO.1		Minor
2	Lines	In accordance with Screen Cosmetic Criteria (Operating) NO.2		Minor
3	Bubbles in polarizer	Size: d mm	Acceptable Qty in active area	Minor
		d 0.3	Disregard	
		0.3 < d 1.0	3	
		1.0<d 1.5	1	
		1.5<d	0	
4	Scratch	In accordance with spots and lines operating cosmetic criteria. When the light reflects on the panel surface, the scratches are not to be remarkable.		Minor
5	Allowable density	Above defects should be separated more than 30mm each other.		Minor
6	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-lit type should be judged with back-lit on state only.		Minor
7	Contamination	Not to be noticeable.		Minor

u Screen Cosmetic Criteria (Operating)


No.	Defect	Judgement Criterion	Partition
1	Spots	<div>A) Clear<div><div><div>Size: d mm</div><div>d 0.1</div><div>0.1 < d 0.2</div><div>0.2 < d 0.3</div><div>0.3 < d</div></div><div><div>Acceptable Qty in active area</div><div>Disregard</div><div>6</div><div>2</div><div>0</div></div></div></div> <div>Note: Including pin holes and defective dots which must be within one pixel size.</div> <div>B) Unclear<div><div><div>Size: d mm</div><div>d 0.2</div><div>0.2 < d 0.5</div><div>0.5 < d 0.7</div><div>0.7 < d</div></div><div><div>Acceptable Qty in active area</div><div>Disregard</div><div>6</div><div>2</div><div>0</div></div></div></div>	Minor
2	Lines	<div>A) Clear<div><div><div><div>L 5.0</div><div>2.0</div></div><div><div>0.02</div><div>0.05</div><div>0.1</div></div><div><div>(0)</div><div>(6)</div></div><div>See No. 1</div><div>W</div></div></div></div> <div>Note: ()-Acceptable Qty in active area</div> <div>L -Length (mm)</div> <div>W -Width (mm)</div> <div>-Disregard</div> <div>B) Unclear<div><div><div><div>L 10.0</div><div>2.0</div></div><div><div>0.05</div><div>0.3</div><div>0.5</div></div><div><div>(0)</div><div>(6)</div></div><div>See No. 1</div><div>W</div></div></div></div>	Minor

'Clear' = The shade and size are not changed by V0.

'Unclear' = The shade and size are changed by V0.



u Screen Cosmetic Criteria (Operating)(Continued)

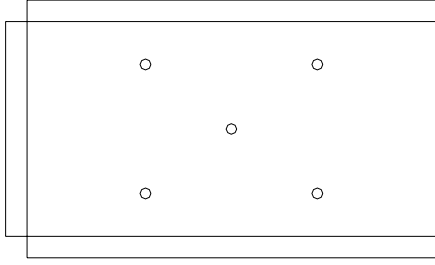No.	Defect	Judgement Criterion	Partition
3	Rubbing line	Not to be noticeable	
4	Allowable density	Above defects should be separated more than 10mm each other	Minor
5	Rainbow	Not to be noticeable	Minor
6	Dot size	To be 95% ~105% of the dot size (Typ.) in drawing . Partial defects of each dot (ex. pin-hole) should be treated as 'spot'. (see Screen Cosmetic Criteria (Operating) NO.1).	Minor
7	Uneven brightness(only back-lit type module)	<p>Uneven brightness must be $B_{MAX}/B_{MIN} \leq 2$</p> <p>-B_{MAX} :Max. value by measure in 5 points</p> <p>-B_{MIN} :Min value by measure in 5 points</p> <p>Divide active area into 4 vertically and horizontally.</p> <p>Measure 5 points shown in the following figure.</p>  <p>○:Measuring points</p>	Minor

Note:

- (1) Size : $d=(\text{long length} + \text{short length})/2$
- (2) The limit samples for each item have priority.
- (3) Complexed defects are defined item by item, but if the number of defects are defined in above table, the total number should not exceed 10.
- (4) In case of 'concentration', even the spots or the lines of 'disregarded' size should not allowed.
Following three situations should be treated as 'concentration'.
 - 7 or over defects in circle of 5mm
 - 10 or over defects in circle of 10mm
 - 20 or over defects in circle of 20mm

PRECAUTIONS FOR USING LCD MODULES

U Handling Precautions

- (1) The display panel is made of glass. Do not subject it to a mechanical shock by dropping it or impact.
- (2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- (5) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
- (6) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solvents
- (7) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (8) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free



of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the back light cable.

- (9) Do not attempt to disassemble or process the LCD module.
- (10) NC terminal should be open. Do not connect anything.
- (11) If the logic circuit power is off, do not apply the input signals.
- (12) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD module.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

u Storage Precautions

When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps. Keep the modules in bags (avoid high temperature/high humidity and low temperatures below 0 °C). Whenever possible, the LCD modules should be stored in the same conditions in which they were shipped from our company.

u Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the module is subject to a low temperature.

If the LCD modules have been operating for a long time showing the same display patterns, the display patterns may remain on the use screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- Exposed area of the printed circuit board.
- Terminal electrode sections.

USING LCD MODULES

u Liquid Crystal Display Modules

LCD is composed of glass and polarizer. Pay attention to the following items when handling.

- (1) Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.
- (2) Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.).
- (3) N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizer and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropyl alcohol.
- (4) When the display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum benzine. Do not scrub hard to avoid damaging the display surface.
- (5) Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation of color fading.
- (6) Avoid contacting oil and fats.
- (7) Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming in contact with room temperature air.
- (8) Do not put or attach anything on the display area to avoid leaving marks on.




- (9) Do not touch the display with bare hands. This will stain the display area and degradate insulation between terminals (some cosmetics are determined to the polarizers).
- (10) As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

u Installing LCD Modules

The hole in the printed circuit board is used to fix LCM as shown in the picture below. Attend to the following items when installing the LCM.

- (1) Cover the surface with a transparent protective plate to protect the polarizer and LC cell.

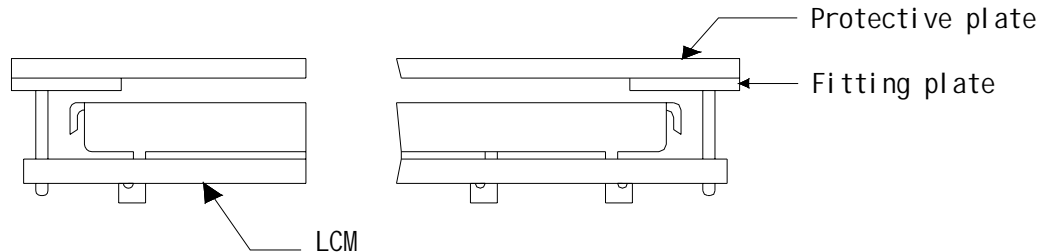

- (2) When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1\text{mm}$.

u Precaution for Handling LCD Modules

Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shock to the modules or making any alterations or modifications to it.

- (1) Do not alter, modify or change the shape of the tab on the metal frame.
- (2) Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- (3) Do not damage or modify the pattern writing on the printed circuit board.
- (4) Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector
- (5) Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- (6) Do not drop, bend or twist LCM.

u Electro-Static Discharge Control

Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.

- (1) Make certain that you are grounded when handling LCM.
- (2) Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.
- (3) When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- (4) When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- (5) As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
- (6) To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%~60% is recommended.

u Precaution for soldering to the LCM

- (1) Observe the following when soldering lead wire, connector cable and etc. to the LCM.
 - Soldering Iron temperature : 280 ± 10 .
 - Soldering time: 3-4sec.




-Solder: eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

- (2) When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- (3) When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

u Precautions for Operation

- (1) Viewing angle varies with the change of liquid crystal driving voltage (V_0). Adjust V_0 to show the best contrast.
- (2) Driving the LCD in the voltage above the limit shortens its life.
- (3) Response time is greatly delayed at temperature below the operating range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- (4) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
- (5) Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40%, 50% RH.
- (6) When turning the power on, input each signal after the positive/negative voltage becomes stable.

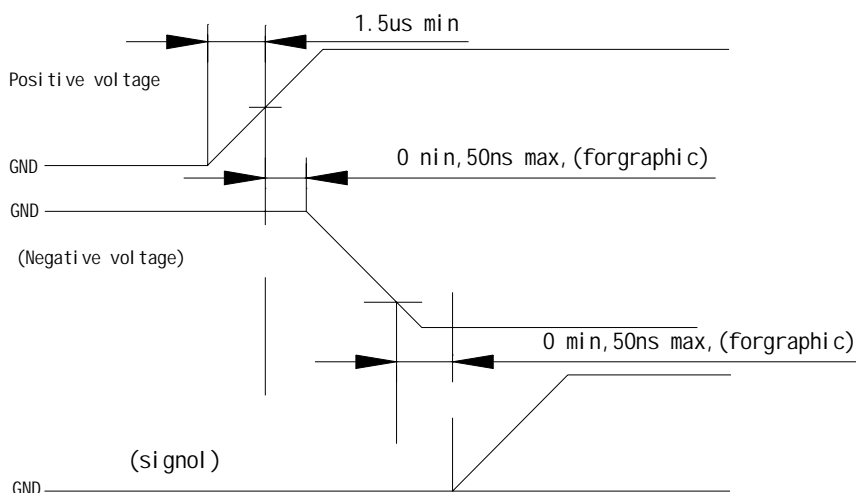

u Storage

When storing LCDs as spares for some years, the following precaution are necessary.

- (1) Store them in a sealed polyethylene bag. If properly sealed, there is no need for desiccant.
- (2) Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.
- (3) The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped.)
- (4) Environmental conditions:
 - Do not leave them for more than 168hrs. at 60°C.
 - Should not be left for more than 48hrs. at -20°C.

u Safety

- (1) It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.
- (2) If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly.

